
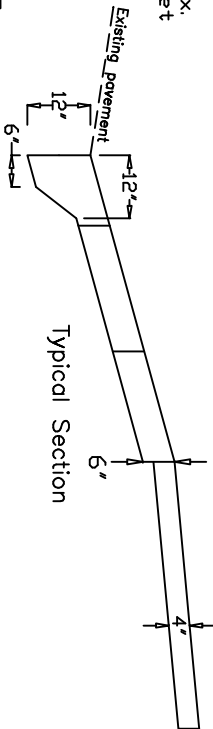


DETECTABLE WARNING/CURB RAMP

NOTE

No slope greater than 1/2"/ft. will be allowed anywhere except longitudinally in the ramp area as shown. Sidewalk wings are NOT allowed. Curb ramp area must be measured from the face of curb. Curb lengths shall be measured outside the ramp area. All ramps hereafter constructed, must have curb ramps installed at all intersections, alleys and drives where a curb could present a barrier between pavement and sidewalk. Detectable warnings shall be constructed on the walking surface of each curb ramp; and also constructed on the walking surface of any walk approaching an intersection, alley or commercial or industrial drive; and also constructed on any walk paralleling a public street not separated by curbs, railings, or other elements between the pedestrian areas and vehicular areas. Detectable warning surfaces shall be differentiated from surrounding concrete walks in color. The warning surface shall be colored RED. Detectable warning surfaces shall meet ADA Accessibility Guidelines and must be the City's acceptable standard.

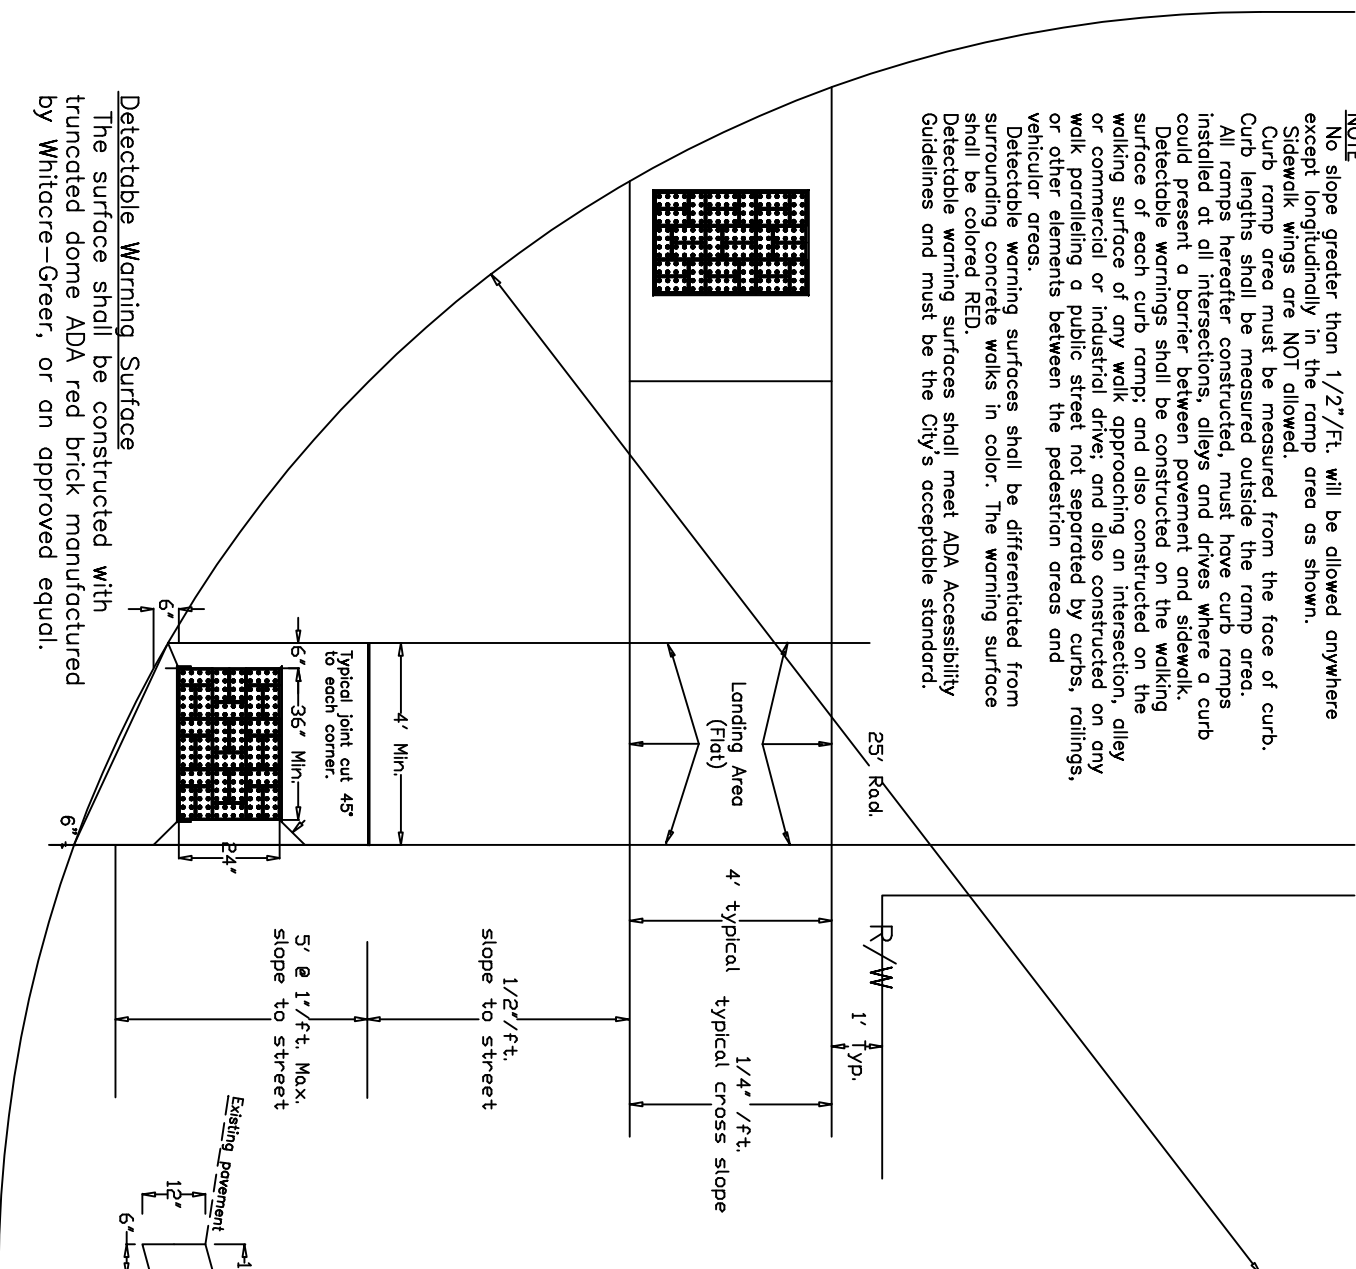

Detectable Warning Surface
 The surface shall be constructed with truncated dome ADA red brick manufactured by Whitacre-Greer, or an approved equal.

STANDARD DRAWING NO. 110d
 CITY OF BOWLING GREEN
 JANUARY 2004